

Instruction and Maintenance Manual

RADIOLOGICAL SURVEY METER

OCDM Item No. CD V-700, Model No. 6B

Manufactured 1962



THE VICTOREEN INSTRUMENT COMPANY
5806 Hough Avenue • Cleveland 3, Ohio

TABLE OF CONTENTS

SECTION 1. PRECAUTIONS

| Paragraph | Page |
|-----------------|------|
| 1.1 Precautions | 3 |

SECTION 2. GENERAL DESCRIPTION

| | |
|------------------------|---|
| 2.1 Introduction | 3 |
| 2.2 The Probe | 3 |
| 2.3 The Circuit Box | 3 |
| 2.4 The Head Phone | 3 |
| 2.5 The Carrying Strap | 3 |

SECTION 3. THEORY OF OPERATION

| | |
|--|---|
| 3.1 Introduction | 4 |
| 3.2 The Geiger Tube | 4 |
| 3.3 The High Voltage Supply | 4 |
| 3.4 The Pulse Shaping and Metering Circuit | 4 |
| 3.5 Scale Ranges | 5 |
| 3.6 The Headphone Circuit | 5 |

SECTION 4. INSTALLATION

| | |
|------------------------------|---|
| 4.1 Installing The Batteries | 5 |
|------------------------------|---|

SECTION 5. OPERATION

| | |
|--|---|
| 5.1 Operating The Circuit The First Time | 7 |
| 5.2 Calibration | 7 |
| 5.3 Scale Ranges | 7 |
| 5.4 Using The Headphones | 7 |
| 5.5 Normal Background | 7 |
| 5.6 Checking Calibration | 8 |
| 5.7 Using The Carrying Strap | 8 |

LIST OF ILLUSTRATIONS

| Figure | Page |
|---|------|
| 1. View of CD V-700, Model No. 6B, Showing Operating Controls | 2 |
| 2. View of CD V-700, Model No. 6B, Showing Major Components | 6 |
| 3. CD V-700, Model 6B, Schematic Circuit Diagram | 11 |

SECTION 6.

OPERATOR'S MAINTENANCE

| Paragraph | Page |
|-------------------------|------|
| 6.1 Battery Replacement | 8 |

SECTION 7.

PREVENTIVE MAINTENANCE

| | |
|------------------|---|
| 7.1 Battery Life | 9 |
| 7.2 Storage | 9 |

SECTION 8.

CORRECTIVE MAINTENANCE

| | |
|--|----|
| 8.1 Replacing The Batteries | 9 |
| 8.2 Replacing The Geiger Tube | 9 |
| 8.3 Checking The High Voltage Supply | 9 |
| 8.4 Checking The Pulse Shaping and Integrating Circuit | 10 |
| 8.5 Testing For Proper Operation Of The Range Switch | 10 |

SECTION 9.

REPLACEABLE PARTS LIST

| | |
|---------------------------|-------|
| 9.1 Electrical Components | 12-13 |
| 9.2 Mechanical Components | 14-15 |
| 9.3 List of Manufacturers | 16 |

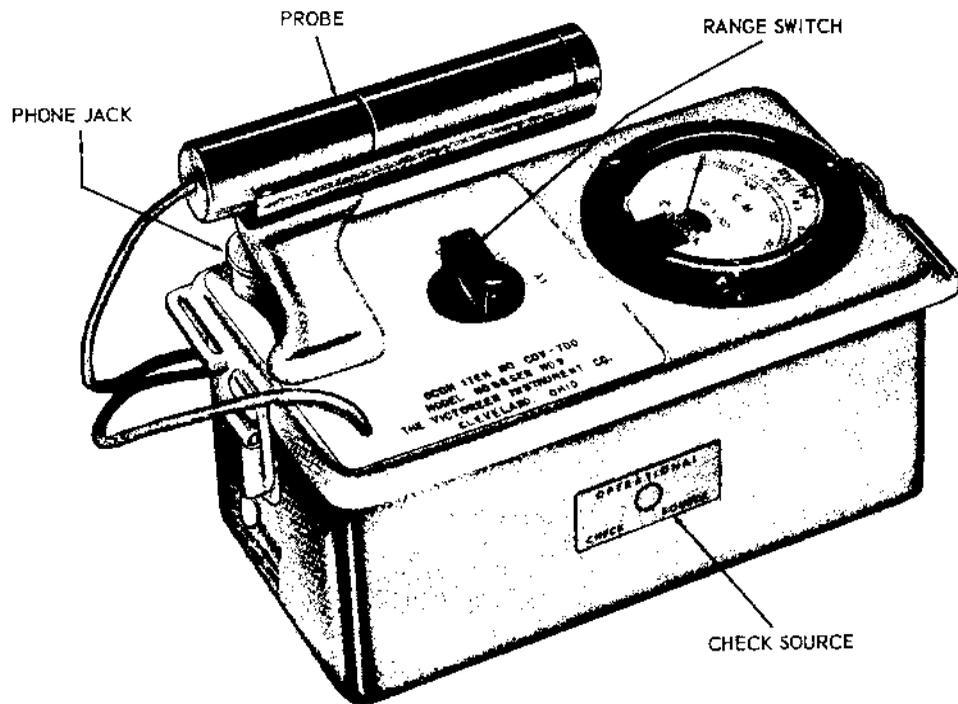


Figure 1. View of CD V-700, Model No. 6B, Showing Operating Controls

1. PRECAUTIONS

1.1 PRECAUTIONS:

Although this instrument is operated from four "D" cells, the high voltage power supply operates at voltages in excess of 900 volts which constitutes a shock hazard if not handled carefully. The power supply high voltage components are located near the high voltage transformer at the rear of the circuit board. These components should not be touched, even when the instrument is "OFF", until the high voltage capacitors are discharged. The method of discharging these capacitors is to short-circuit the two leads of the corona regulator tube V2 with a screwdriver which has an insulated handle.

2. GENERAL DESCRIPTION

2.1 INTRODUCTION:

This instrument is a portable survey meter using a geiger tube as the detector. The geiger tube is mounted in a probe on the end of a thirty-six inch cable. The entire instrument and its accessories comprise a circuit box, a probe, a headphone and a carrying strap; a radioactive sample is mounted on the side of the case.

2.2 THE PROBE:

The probe comprises a nickel-plated brass shield with a window which may be opened in order to admit beta radiation. Within the probe is mounted a plug-in type geiger tube which is sensitive to moderate and high energy beta radiation and to gamma radiation down to low energies. Because the geiger tube is fragile, shock mounts are provided on both ends of the tube. In addition, rubber gasketing is used to seal against moisture.

2.3 THE CIRCUIT BOX:

The circuit box consists of the supply batteries, an electronic high voltage supply, an electronic pulse shaping and metering circuit and a radioactive sample. The system is shockproof and waterproof and is secured with rapid take-down clamps in order to make access very simple. The entire electronic circuit is mounted on a single card with connections going to the probe, the phone connector and to the meter. The batteries are housed in a high-impact resistant plastic case which cannot be corroded by leaking battery fluids. The battery contacts are readily replaceable without tools to facilitate cleaning or replacement. The battery box is designed to be mechanically selective so that batteries cannot be inserted backwards.

2.4 THE HEAD PHONE:

The head phone is a single piece magnetic type device with a connector suitable for mating with the sealed jack mounted on the circuit box.

2.5 THE CARRYING STRAP:

The carrying strap, made of vinyl for easy decontamination, is provided with easily operated spring clips.

3. THEORY OF OPERATION

3.1 INTRODUCTION:

Operationally this instrument consists of a geiger tube radiation detector, a regulated high voltage supply, a pulse shaping and metering circuit, an indicating meter and headphone for audible detection of activity.

3.2 THE GEIGER TUBE:

The geiger tube is a gas filled device which detects the presence of ionization within its gaseous volume. The ionization results from the passage of ionizing type radiation through the gas. The primary type of radiation it detects is beta rays (high speed electrons). These are produced as a primary breakdown product of radioactive substances and in addition are produced within the geiger tube and within the walls of the probe by gamma radiation. A shield is provided which stops external beta radiation, thus making the detector sensitive to gamma radiation only, but a window in the probe may be opened to make the system sensitive to beta radiation also. The geiger tube operates at 900 volts which is essentially the center of a plateau extending from about 850 volts to about 920 volts.

3.3 THE HIGH VOLTAGE SUPPLY:

The high voltage power supply is a blocking oscillator driven "fly-back" type circuit. The blocking oscillator portion of the circuit consists of Q_2 , R5A, transformer windings 3-4 and 5-6, and batteries BT1-2. When the instrument is turned "ON," Q_2 conducts and an increasing current flows through winding 3-4. This increasing collector current induces a voltage in winding 5-6 which maintains conduction of Q_2 . The collector current increases until Q_2 has insufficient current gain to remain saturated when the circuit rapidly turns "OFF" due to the regenerative action of the transformer. During the "turn-off" action, large "fly-back" voltages appear across all transformer windings. A voltage peak of about 1100 volts appears across winding 1-2 because of the large number of turns in the winding. This voltage "fly-back" is rectified by components CR3 and C5, in the conventional manner and components R9 and C4 form a filter to smooth the pulsations of voltage across C5. V2 is a corona-discharge type regulator tube which regulates the high voltage to about 900 volts throughout the battery life.

3.4 THE PULSE SHAPING AND METERING CIRCUIT:

The pulse shaping circuit is a blocking oscillator similar to the power supply with some exceptions. The circuit is held "cut-off" by the bias formed by resistors R7 and R8 and the power supply battery.

The blocking oscillator consists of components Q_1 and T_1 . Negative pulses from the geiger tube appear across winding 3-4 of T_1 . These pulses are coupled into winding 2-5 and into the base circuit of Q_1 . When Q_1 is turned "ON" by a GM tube trigger, Q_1 saturates and nearly all of the battery voltage of BT3-4 appears across winding 1-6. The winding current increases and a voltage is induced in winding 2-5. The induced voltage is in a direction such that conduction of Q_1 is maintained. Winding 2-5 current increases linearly until the transformer core saturates. At this time the circuit rapidly turns "OFF" and an inductive "fly-back" appears across both windings.

The metering circuit consists of an integrating capacitor C_1 , and range multiplier resistors R_1 through R_3 . The multipliers determine the amount of charge that is placed on C_1 during the pulse period of the blocking oscillator. The charge on the capacitor is discharged by the meter and R_4 . R_5B is used for calibration.

3.5 SCALE RANGES:

Three ranges of operation are provided. The first range X_1 , requires 300 pulses per minute for full scale indication; the second range X_{10} , 3000 pulses per minute; and the third range X_{100} , 30,000 pulses per minute. These correspond respectively to 0.5 milliroentgens per hour, 5 milliroentgens per hour and 50 milliroentgens per hour of radium-equivalent radiation. Scale changing is effected by switching meter range resistors.

3.6 THE HEADPHONE CIRCUIT:

The voltage pulse for the headphone is taken from the "fly-back" of winding 1-6 via diode CR_2 . C_3 is an integrating capacitor to "stretch" the "fly-back" pulse. C_2 couples the pulse to the headphone.

4. INSTALLATION

4.1 INSTALLING THE BATTERIES:

The instruments are shipped with the batteries removed. In order to put the instrument into operation, the following procedure should be observed: Access to the interior of the instrument is accomplished by snapping open the pull catch at each end of the case and separating the top from the case bottom. This exposes the two battery boxes and two battery retainer clips. Remove each retainer clip by squeezing its ends until it can be pulled out of the slots in the battery box. Insert the batteries in the battery boxes observing the indicated polarity. (Each battery box is designed to be mechanically selective so that the batteries cannot be inserted with reversed polarity). Replace the battery retainer clips. Align the top with the case bottom and squeeze together gently. Snap the pull catches closed.

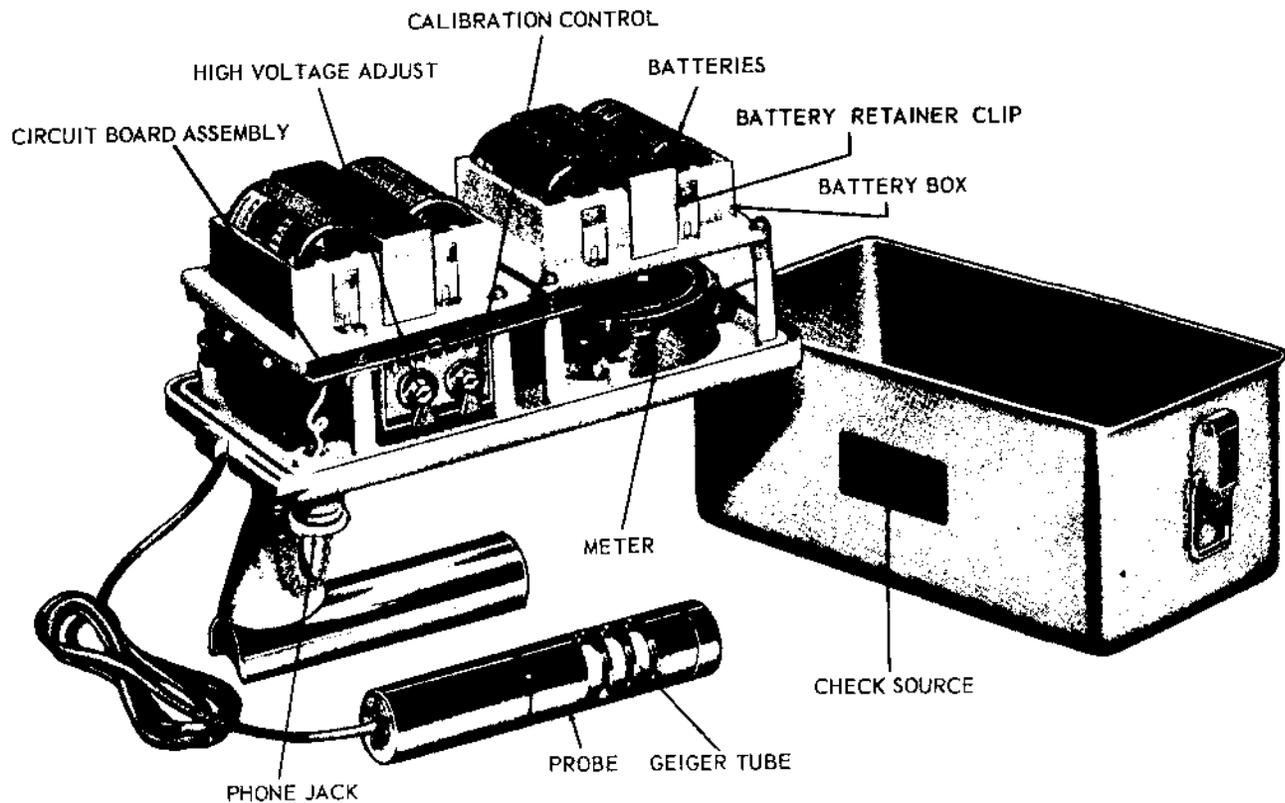


Figure 1. View of CD V-700, Model No. 6B, Showing Operating Controls

5. OPERATION

5.1 OPERATING THE CIRCUIT THE FIRST TIME:

Clamp the circuit box back together and turn the switch to the X10 scale. Make certain that the sliding beta window of the probe is closed. Wait thirty seconds for the system to reach stability. The indicator should remain substantially at zero.

Open the window on the probe and present it to the center of the calibration source which is a beta radiation sample. The indicator should fall between 1.5 mr/hr and 2.5 mr/hr, averaging about 2 mr/hr.

5.2 CALIBRATION:

NOTE: The beta source must constitute the sole source of radiation when calibration is performed. Calibration must not be undertaken when the background is above normal or when the probe is in a radiation field other than that produced by the known beta source supplied with the instrument.

If the indication falls above or below this range, it may be corrected by the screw-driver adjustment inside the box which is marked "CAL". Advancing the adjustment clockwise increases the reading.

5.3 SCALE RANGES:

There is only one control on this instrument for the operator to use. It is the range control, comprising an "OFF" position and three ranges labeled, "X100, X10, and X1". These respectively are both 100 times, 10 times and 1 time the scale reading in milliroentgens per hour and counts per minute shown on the meter. This scale is 0.5 milliroentgens per hour and 300 counts per minute respectively with the major divisions all indicated on a 50-division scale.

5.4 USING THE HEADPHONES:

If the operator chooses to use a headphone with the instrument, it is screwed into the connector provided immediately to the left of the handle. The yellow plastic protective cap is removed. In using the headphone, the operator will note that each pulse arriving at the instrument is indicated by a distinctively audible "click" in the headphones.

5.5 NORMAL BACKGROUND:

Since normal background of radioactivity is of the order of 0.01 to 0.02 milliroentgens per hour, little activity will normally be observed. Under background conditions only about 20 per minute of these clicks occur and they are randomly spaced so that one may wait for several seconds before any

click is observed and then there may be two or three in rapid succession. Very accurate measurements of background and other low level radiation can be made by counting headphone clicks and timing with a watch which has a second hand. The procedure is to count a given number of counts and observe the time required to obtain these counts. The radiation rate in counts per minute is the number of counts divided by the time in minutes. Table I gives the number of counts that are required to provide a given percentage error where percent standard error is defined as that error for which in 68 cases out of 100 the true error will not exceed the given percentage error. The nine-tenths error is that error for which the true reading is no different from the observed reading within the given percentage limits for 90 cases out of 100.

TABLE I

| Percent Error | Number of Counts Required For: | |
|---------------|--------------------------------|-------------------|
| | Standard Error | Nine-Tenths Error |
| 1% | 10,000 Counts | 27,000 Counts |
| 3% | 1,100 Counts | 3,000 Counts |
| 10% | 100 Counts | 271 Counts |

5.6 CHECKING CALIBRATION:

The operator should periodically check the calibration of the instrument to verify that it is correct. This operation is described in paragraph 5.2.

5.7 USING THE CARRYING STRAP:

The instrument may be carried in the hand or by a strap over the shoulder. The strap anchors are arranged in such a way that the meter is visible when carried over the right shoulder.

6. OPERATOR'S MAINTENANCE

6.1 BATTERY REPLACEMENT:

Battery replacement is easily accomplished by removing the circuit box bottom and the battery retaining clips on the two battery boxes. The old cells may be pulled out without tools and the new ones inserted.

7. PREVENTIVE MAINTENANCE

7.1 BATTERY LIFE:

CAUTION: Make certain the instrument is turned off at all times when not in use, otherwise the batteries will certainly be depleted and the instrument rendered ineffective. The life of the batteries in the front battery box is about 100 hours under continuous operation and about 175 hours when operated four hours a day. The life of the other two cells is considerably longer but it is recommended that all batteries be replaced at one time. It is also recommended that the operator become accustomed to noting that the operating switch is in the "OFF" position when the instrument is set aside.

7.2 STORAGE:

For storage purposes it is best, wherever possible, to keep the instrument in a moderately cool area as this will provide greater shelf life for the batteries. At all times one should attempt to prevent radiological contamination of the instrument and particularly of the probe.

8. CORRECTIVE MAINTENANCE

8.1 REPLACING THE BATTERIES:

Battery replacement is accomplished as outlined in paragraph 6.1. The end point of the cells in the front battery box is 1 volt per cell. The end point of the other cells is 2.5 volts for proper accuracy of the counting circuit. However, it is recommended that all batteries be replaced at one time in order that the shelf life of the counting circuit batteries is not exceeded.

8.2 REPLACING THE GEIGER TUBE:

The chief maintenance on this instrument is replacing the batteries. However, the geiger tube also expends itself with use and must be replaced occasionally but one cannot predict precisely the life of a geiger tube since the total number of counts it has accumulated and the operating conditions of temperature, voltage and load characteristics are very important. Whenever fresh batteries are installed into the instrument and the instrument does not work correctly, it is wise first to try replacing the geiger tube before making any further attempts at circuit checking.

8.3 CHECKING THE HIGH VOLTAGE SUPPLY:

When the power supply is operating, a buzz of about 200 cps. in frequency can be heard due to the oscillations of the power transformer laminations. If the buzz is not audible, the oscillator section is probably not operating

and the setting of R5A should be checked. This screw-driver adjustment is set properly by the following procedure:

- a. Inset a 0-100 millampere meter in series with the power supply batteries.
- b. Turn the "HV" adjustment full clockwise.
- c. Turn the instrument "ON."
- d. Advance the screw-driver adjustment counter-clockwise until the meter reads 33 milliamperes with new batteries.

The high voltage output of the power supply should be tested with an electrostatic voltmeter. The voltage should read 910 ± 10 volts. This voltage may also be measured with a 20,000 ohms-per-volt meter on the 5,000 volt range with new batteries in the instrument.

The nominal resistance values for the transformer are: winding 1-2, 4500 ohms; winding 3-4, 11 ohms; and winding 5-6, 5 ohms (all values $\pm 20\%$).

8.4 CHECKING THE PULSE SHAPING AND INTEGRATING CIRCUIT:

After continuity tests have been made, the integrating circuit should be tested further using an oscilloscope. The proper pulse waveshape on the collector of Q_1 is a positive 3 volt square wave of a nominal 150 microseconds in duration followed by a "fly-back" of about -20 volts in amplitude. Diodes CR1 and CR2 may be tested with an ohmmeter on the RX10,000 range. One end of the diode under test should be disconnected from the circuit for this test. (Diode CR3 in the high voltage power supply will not respond to this test.) The indication of a good diode is very low resistance with the ohmmeter leads connected a given way. With the leads reversed the resistance reading should be 100k ohms or greater for CR2, and 1 megohm or better for CR1.

8.5 TESTING FOR PROPER OPERATION OF THE RANGE SWITCH:

The range switch may be tested with an ohmmeter for proper closure of the switch contacts. The power supply "ON-OFF" section of the switch may be recognized by the red battery lead and the emitter of Q_1 connecting to the switch. With the batteries removed, test for proper "ON-OFF" operation. A similar test can be made for "ON-OFF" operation of the counting circuit, with the ohmmeter connected to ground and to the black battery lead. To test the range circuit, connect the ohmmeter to ground and the negative (white end) terminal of 400 mfd capacitor C1, and read the following resistance values:

X100 range reads 1900 ohms, X10 range reads 200 ohms, and X1 range reads 16.5 ohms. (All values $\pm 5\%$). The batteries should be removed for all tests in this section.

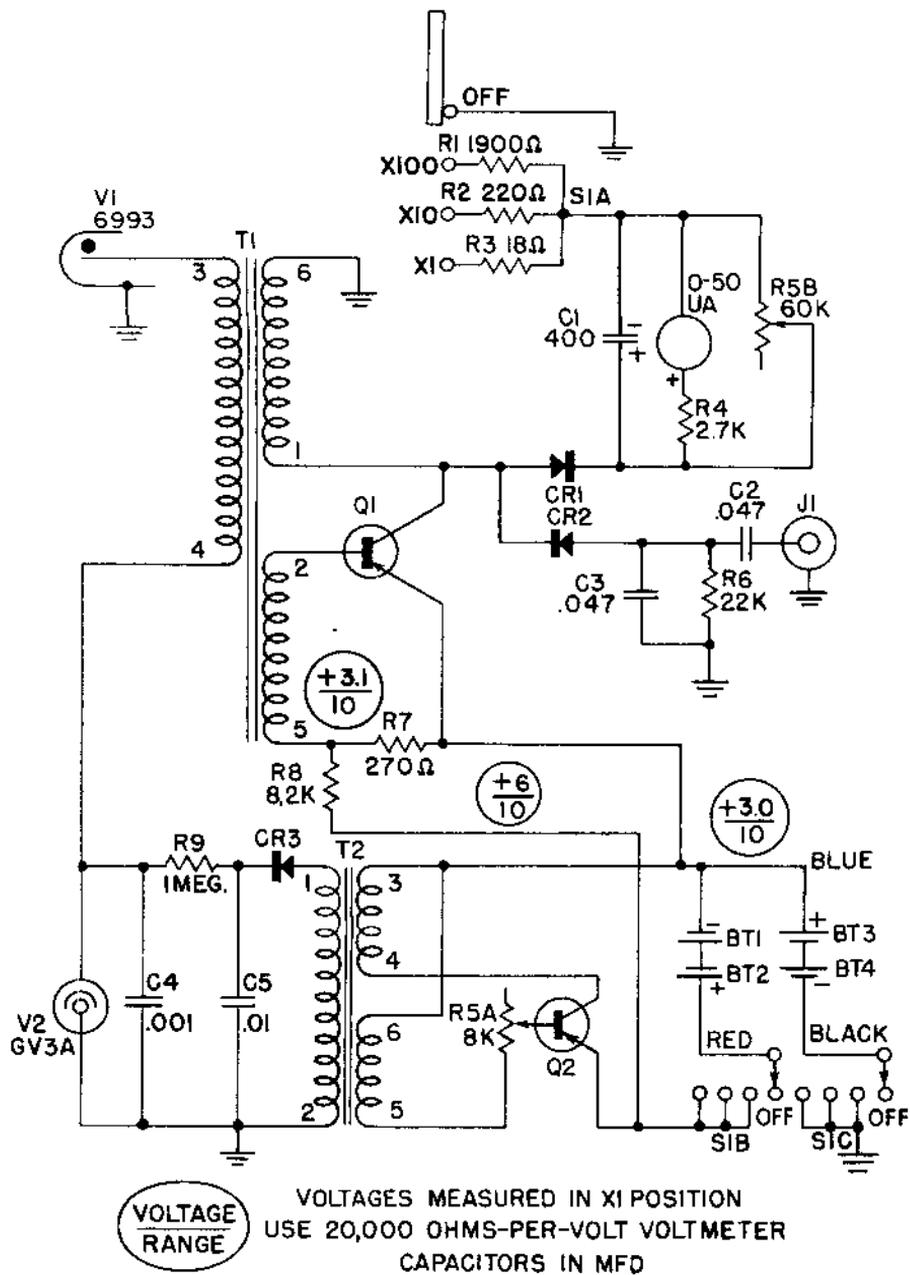


Figure 3. CD V-700, Model No. 6B, Schematic Circuit Diagram

9. REPLACEABLE PARTS LIST:

9.1 Electrical Components

12

| Circuit Symbol | Description | Function | Manufacturer | Manufacturer's Part No. | Victoreen Part No. | Quantity per Equipment | •Recommended Qty. for Plant & Field Maintenance |
|----------------|----------------------------|---------------------------|-------------------------------|-------------------------|--------------------|------------------------|---|
| BT1 | Battery: 1.5 Volt | Power Supply Battery | Union Carbide Consumer Prods. | 950 | 16-4 | 4 | 10 |
| BT2 | Same as BT1 | Power Supply Battery | ----- | ----- | --- | --- | --- |
| BT3 | Same as BT1 | Ratemeter Battery | ----- | ----- | --- | --- | --- |
| BT4 | Same as BT1 | Ratemeter Battery | ----- | ----- | --- | --- | --- |
| C1 | Capacitor: 400 mfd; 3V | Integrating Capacitor | Nashville Electronics Inc. | 24-500BP400-3D65 | 21-87 | 1 | 1 |
| C2 | Capacitor: .047 mfd; 50V | Coupling Capacitor | John E. Fast Co. | ----- | 21-390 | 2 | 2 |
| C3 | Same as C2 | Headphone Pulse Stretcher | ----- | ----- | --- | --- | --- |
| C4 | Capacitor: .001 mfd; 1000V | By-Pass Capacitor | Aerovox Corp. | 6102624410011420 | 21-43 | 1 | 1 |
| C5 | Capacitor: .01 mfd; 1600V | Charging Capacitor | Electro-Ceramic Co. | ----- | 21-23 | 1 | 1 |
| CR1 | Diode: Silicon | Meter Rectifier | Victoreen | 52-35 | 52-35 | 1 | 5 |
| CR2 | Diode: Germanium | Headphone Coupling | Victoreen | 52-1 | 52-1 | 1 | 5 |
| CR3 | Selenium Rectifier | H. V. Rectifier | Electronic Devices Inc. | SQ40HP | 489-17 | 1 | 5 |
| J1 | Phone Jack Assembly | Aural Indicator | Victoreen | 700-102 | 700-102 | 1 | 1 |
| M1 | Meter | Visual Indicator | Victoreen | 700-95 | 700-95 | 1 | 5 |

9.1 Electrical Components (con'td)

| | | | | | | | |
|-----|---|---------------------------------|--------------------------------|-------------------|----------|-----|-----|
| Q1 | Transistor | Ratemeter Transistor | Victoreen | 23-17 | 23-17 | 1 | 1 |
| Q2 | Transistor | Power Supply Transistor | Victoreen | 23-6 | 23-6 | 1 | 1 |
| R1 | Resistor: 1900 Ω ; $\frac{1}{2}$ W; 5% | X100 Range Multiplier | International Resistance Co. | GBT $\frac{1}{2}$ | 185-1412 | 1 | 1 |
| R2 | Resistor: 220 Ω ; $\frac{1}{2}$ W; 5% | X10 Range Multiplier | ----- | ----- | 185-560 | 1 | 1 |
| R3 | Resistor: 18 Ω ; $\frac{1}{2}$ W; 5% | X1 Range Multiplier | ----- | ----- | 185-450 | 1 | 1 |
| R4 | Resistor: 2.7K; $\frac{1}{2}$ W; 10% | Meter Time Constant | ----- | ----- | 185-252 | 1 | 1 |
| R5A | Dual Potentiometer: 8K; 30% | Power Supply Adjust | Centralab Inc. | Model 5 Type 70-2 | 22-158 | 1 | 1 |
| R5B | Section of R5A: 60K; 30% | Calibrate Resistance | ----- | ----- | 60K-8K | --- | --- |
| R6 | Resistor: 22K; $\frac{1}{2}$ W; 20% | Headphone Time Constant | International Resistance Corp. | GBT $\frac{1}{2}$ | 185-1365 | 1 | 1 |
| R7 | Resistor: 270 Ω ; $\frac{1}{2}$ W; 10% | $\frac{1}{2}$ of Ratemeter Bias | ----- | ----- | 185-78 | 1 | 1 |
| R8 | Resistor: 8.2K; $\frac{1}{2}$ W; 10% | $\frac{1}{2}$ of Ratemeter Bias | ----- | ----- | 185-200 | 1 | 1 |
| R9 | Resistor: 1 Meg; $\frac{1}{2}$ W; 20% | Filter Resistor | ----- | ----- | 185-1305 | 1 | 1 |
| S1 | Switch | Range Switch | Victoreen | 700-6 | 700-6 | 1 | 1 |
| S1A | Section of S1 | ----- | ----- | ----- | ----- | --- | --- |
| S1B | Section of S1 | ----- | ----- | ----- | ----- | --- | --- |
| S1C | Section of S1 | ----- | ----- | ----- | ----- | --- | --- |
| T1 | Transformer Assembly, Pulse | Pulse Transformer | Victoreen | 700-154 | 700-154 | 1 | 1 |
| T2 | Transformer | "Fly-Back" Transformer | Victoreen | 14-32 | 14-32 | 1 | 1 |
| V1 | GM Tube: 6993 | Detecting Element | Victoreen | CPO-352 | CPO-352 | 1 | 5 |
| V2 | Tube: CV3A; 900V | Corona Voltage Regulator | Victoreen | CPO-240 | CPO-240 | 1 | 5 |

*Quantity of field and plant maintenance supply parts based on five instruments for one year.

9.2 Mechanical Components

| Description | Function | Manufacturer | Manufacturer's Part No. | Victoreen Part No. | Quantity per Equipment | *Recommended Qty. for Plant & Field Maintenance |
|------------------------------|---------------------------------------|--------------------------|-------------------------|--------------------|------------------------|---|
| Headset | Aural Indicator | Superex Electronics Inc. | — | 700-16 | 1 | 2 |
| Phone Plug | Headset Connection | Zoron Inc. | 40121 | 700-57 | 1 | 2 |
| Strap Buckle | Carrying Strap Length Adjustment | Waterbury Buckle Co. | 807 5047 | 710-44 | 2 | 4 |
| Strap Fastener | Attaches Shoulder Strap to Instrument | Victoreen | 700-82 | 700-82 | 2 | 4 |
| Shoulder Strap | Carrying Strap | Victoreen | 700-81 | 700-81 | 1 | 2 |
| Case Bottom & Clamp Assembly | Bottom Case of Instrument | Victoreen | 700-158 | 700-158 | 1 | 2 |
| Circle Label | Circuit Diagram | Victoreen | 700-161 | 700-161 | 1 | 5 |
| Battery Retainer Clip | Holds Batteries in Battery Box | Victoreen | 720-121 | 720-121 | 2 | 6 |
| Battery Contact | Electrical Connections to Batteries | Victoreen | 700-68 | 700-68 | 8 | 25 |
| Knob | Operating Control Knob | H. Davies Molding Co. | 1500K | 9-9 | 1 | 3 |
| "O" Ring | Switch Shaft Seal | Parker Appliance Co. | 5427-1 | 46-38 | 1 | 3 |
| Grommet | Holds (V2) Tube | Philpott Rubber Co. | GB-225 | 51-7 | 1 | 5 |

9.2 Mechanical Components (cont'd)

| | | | | | | |
|-------------------------------|---|----------------------|-------------------------------------|---------|---|----|
| Tube Clip | Holds V2 Tube to Circuit Board | Victoreen | 700-94 | 700-94 | 1 | 5 |
| Battery Box | Holds Batteries | Victoreen | 700-66 | 700-66 | 2 | 10 |
| Circuit Board | Holds Electronic Parts | Victoreen | 700-159 | 700-159 | 1 | 5 |
| Seal Nut | Clamps Probe Cable | Victoreen | 700-72 | 700-72 | 1 | 5 |
| Rubber Gland | Seals Probe Cable | Victoreen | 700-71 | 700-71 | 1 | 5 |
| Washer | Bearing Surface | Victoreen | 44-61 | 44-61 | 1 | 5 |
| Probe Assembly | Sensing Element | Victoreen | 700-175 | 700-175 | 1 | 3 |
| Gasket | Seals Probe | Victoreen | 700-174 | 700-174 | 1 | 5 |
| Probe Shield Retaining Spring | Holds Probe Shield in Place | Victoreen | 700-87 | 700-87 | 1 | 5 |
| Detent Ball | Positions Sliding Probe Shield | New Departure | $\frac{1}{4}$ " Ball 44055 Gr. 2 | 700-89 | 1 | 5 |
| Detent Spring | Holds Detent Ball in Place | Victoreen | 700-171 | 700-171 | 1 | 5 |
| End Cap | End Cap of Probe | Victoreen | 700-78 | 700-78 | 1 | 5 |
| Probe Clip | Holds Probe to Case Handle | Victoreen | 700-169 | 700-169 | 1 | 5 |
| Cap Plug & Chain Assembly | Covers Phone Jack | Victoreen | 700-65 | 700-65 | 1 | 5 |
| "O" Ring | Seals Probe Stand | Parker Appliance Co. | 2-9 | 46-25 | 1 | 5 |
| Probe Stand Handle | Carry Handle of Instrument | Victoreen | 700-73 | 700-73 | 1 | 5 |
| "O" Ring | Seals Phone Jack | Parker Appliance Co. | 2-12 | 46-47 | 1 | 5 |
| Meter Gasket | Water-Tight Seal Between Case Top & Meter | Victoreen | 700-63 | 700-63 | 1 | 5 |
| Case Gasket | Water-Tight Seal Between Case Top & Case Bottom | Victoreen | 720-157 | 720-157 | 1 | 10 |
| Case Top | Top Case of Instrument | Victoreen | 700-162 | 700-162 | 1 | 5 |
| Instruction Manual | Operating Instructions | Victoreen | 700-151 | 700-151 | 2 | 10 |

*Quantity of field and plant maintenance supply parts based on five instruments for one year.

9.3 List of Manufacturers

AEROVOX CORPORATION, Myrtle Beach, South Carolina
CENTRALAB, INCORPORATED, 900 East Keefe Avenue, Milwaukee, Wisconsin
ELECTRO-CERAMICS, INCORPORATED, 120 State Street, New Haven, Connecticut
ELECTRONIC DEVICES, INCORPORATED, 50 Webster Avenue, New Rochelle, New York
HARRY DAVIES MOLDING COMPANY, 1428 North Wells Street, Chicago 10, Illinois
INTERNATIONAL RESISTANCE COMPANY, 401 North Broad Street, Philadelphia, Pennsylvania
JOHN E. FAST COMPANY, 3580 North Elston Avenue, Chicago, Illinois
NASHVILLE ELECTRONICS, INCORPORATED, 309 Eleventh Avenue, Nashville, Tennessee
NEW DEPARTURE DIVISION, GMC, 53 Purchase Street, Bristol, Connecticut
PARKER APPLIANCE COMPANY, 17325 Euclid Avenue, Cleveland 12, Ohio
PHILPOTT RUBBER COMPANY, 2077 30th Street, Cleveland 15, Ohio
SUPEREX ELECTRONICS, INCORPORATED, 46 Radford Place, Yonkers, New York
UNION CARBIDE CONSUMERS PRODUCTS COMPANY, 30 East 42nd Street, New York, New York
VICTOREEN INSTRUMENT COMPANY, 5806 Hough Avenue, Cleveland 3, Ohio
WATERBURY BUCKLE COMPANY, 862 South Main Street, Waterbury 20, Connecticut
ZORON, INCORPORATED, 612 West Monroe Street, Chicago, Illinois